

Omni Directional Antenna **WideLink**

Version 1



WLOMI-S-198270-2.5-P 1980-2700 MHz

Electrical Specification

Frequency range	1980 - 2700 MHz
Gain	2.8 dBi
VSWR	2.5 : 1 (Max.)
Polarization	Linear, Vertical
HPBW/horizontal	360°
HPBW/vertical	70°
Power handling	5 W (cw)
Impedance	50 Ohm
Connector	SMA Plug
Lightning protection	DC ground

Environmental & Mechanical Characteristics

Temperature	-20°C to +70°C
Humidity	95% @55°C
Radome color	Black
Radome material	PC
Weight	18.5 g
Dimensions	143.7 x 22.5 x 13.5mm
Waterproof	IP-67
Mount kit	N/A

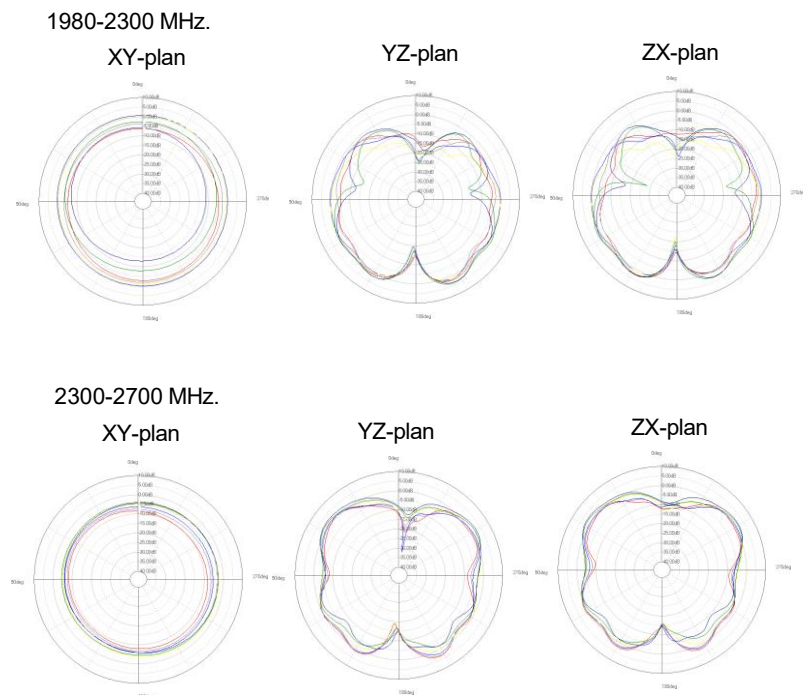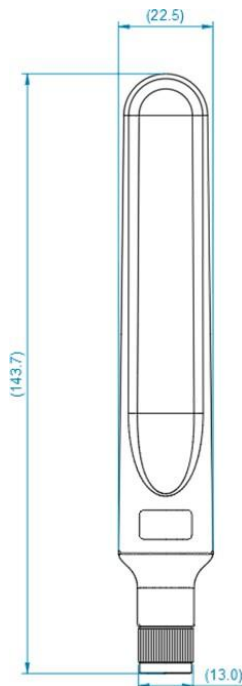

洵霖國際科技有限公司/聖豐興業有限公司
Tel : 03-6020955 ; Fax : 03-5309157
Add:新竹市牛埔南路169-27號/新竹市中山路391號